

**HRS1K**


SIGNAL RELAY

**Features**

- Microminiature relay  
Dimensions: 15.6×10.6×11.8 (mm)
- High sensitivity
- Contact: 1 Form C
- Dielectric strength of 2500V between coil and contacts

**Safety Approval**

 US NO.E164730   
  NO.CQC12002086133  
 NO.R 50103498

**Relay Picture****ORDERING INFORMATION****HRS1K** [H] - [S] - [DC12V] [E]

Model	Coil Sensitivity	Enclosure	Coil Voltage	Dielectric Strength
	H - High Sensitivity (200mW) Blank - Standard (360mW)	S - Plastic Sealed Type	DC3V, DC5V, DC6V DC9V, DC12V, DC24V	E - 2,500VAC/1min between coil and contacts Blank - 1,500VAC/1min between coil and contacts

Remarks: 1. Available in 1 Form C only    2. Contact rating: 1A, 3A

**SPECIFICATION****CONTACT DATA**

Contact Form		1 Form C
Contact Material		AuAg overlay
Contact Rating		1A 120VAC/24VDC 3A 120VAC/24VDC
Contact Resistance		Max. 50mΩ (6VDC 0.1A)
Load	Max. Switching Voltage	220VAC/30VDC
	Max. Switching Current	3A
	Max. Switching Power	360VA, 72W
	Min. Switching Load	5VDC, 10mA
Life	Electrical	100,000 operations (1A 120VAC/24VDC) 50,000 operations (3A 120VAC/24VDC)
	Mechanical	10,000,000 operations

**COIL DATA**

Nominal Coil Power	200mW, 360mW
--------------------	--------------

**GENERAL DATA**

Insulation Resistance		Min. 100MΩ 500VDC
Dielectric Strength	Between open contacts	750VAC, 1min
	Between coil and contacts	Standard: 1,500VAC, 1min E: 2,500VAC, 1min
Operate Time		Max. 5ms
Release Time		Max. 5ms
Operating Temperature		-25℃ to +70℃
Humidity		35~95%RH, +40℃
Shock Resistance	Endurance	1,000m/s <sup>2</sup>
	Misoperation	100m/s <sup>2</sup>
Vibration Resistance	Endurance	10~55Hz, 1.5mm double amplitude
	Misoperation	10~55Hz, 1.5mm double amplitude
Weight		Approximately 4.0g

Note: Data shown are of initial value

**SAFETY APPROVAL**

File Number	Contact Form	Power Consumption	Coil Voltage	Contact Rating	Remarks
UL E164730	C	0.20W/0.36W	3-24VDC	1A 120VAC/24VDC	Ambient Temperature: 70℃
TUV R 50103498	C	0.20W/0.36W	3-24VDC	1A 120VAC/24VDC	Ambient Temperature: 70℃
				3A 250VAC	Ambient Temperature: -25℃~25℃
CQC 12002086133	C	0.20W/0.36W	3-24VDC	1A 120VAC	Ambient Temperature: -40℃~70℃

Specifications subject to change without notice

ISO9001、ISO/TS16949、ISO14001 Approved

**HKE** HRS1K-40


COIL DATA

Ambient Temperature: 23°C


Model	Nominal Voltage VDC	Coil Resistance $\Omega$ +/-10%	Operate Voltage $\leq$ VDC	Release Voltage $\geq$ VDC	Coil Power mW
HRS1K-S-DC3V	3	25	2.1	0.3	360
HRS1K-S-DC5V	5	70	3.5	0.5	
HRS1K-S-DC6V	6	100	4.2	0.6	
HRS1K-S-DC9V	9	225	6.3	0.9	
HRS1K-S-DC12V	12	400	8.4	1.2	
HRS1K-S-DC24V	24	1600	16.8	2.4	
HRS1KH-S-DC3V	3	45	2.25	0.3	200
HRS1KH-S-DC5V	5	125	3.75	0.5	
HRS1KH-S-DC6V	6	180	4.5	0.6	
HRS1KH-S-DC9V	9	405	6.75	0.9	
HRS1KH-S-DC12V	12	720	9.0	1.2	
HRS1KH-S-DC24V	24	2880	18.0	2.4	

OUTLINE, WIRING DIAGRAM, MOUNTING HOLE LAYOUT (UNIT: mm)


Outline

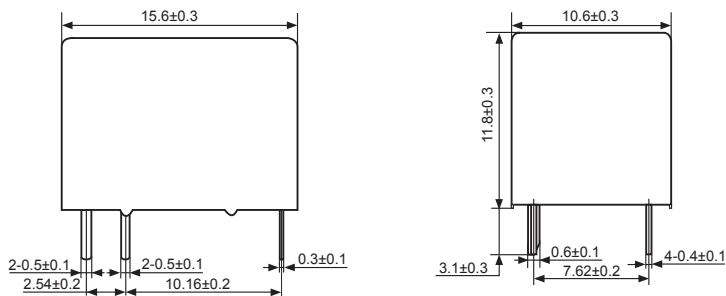

Mounting Hole Layout (Bottom View)




Wiring Diagram (Bottom View)




## REFERENCE DATA


Time Curve

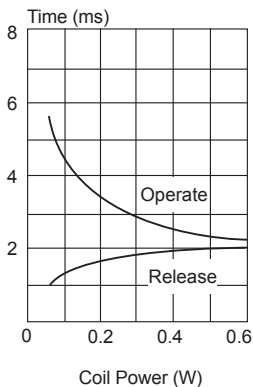


Coil Temperature Rise

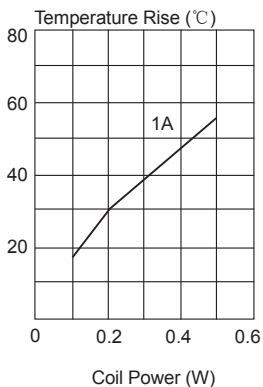

Operate Range

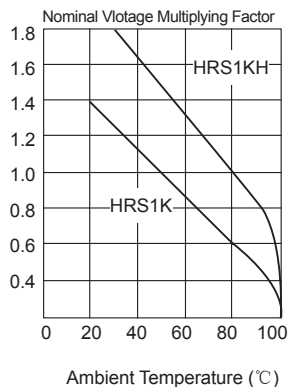

Life Curve

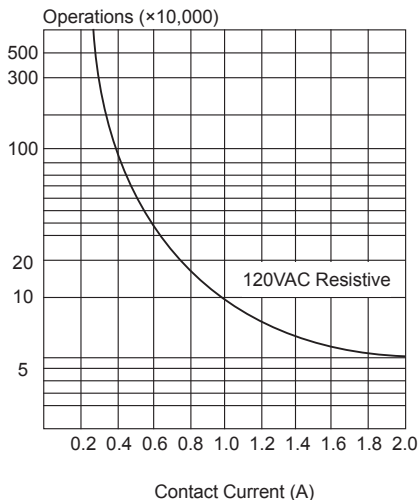

Maximum Switching Power

